




CONNECTION INSTRUCTIONS

Pairing WiFi-104 to UX-8 Controller & Zone Receivers

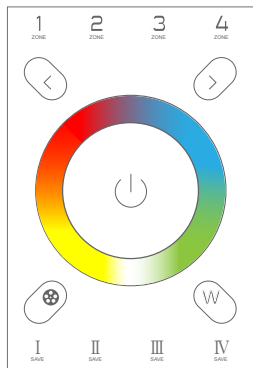


ADDRESS SETTING
Use this button to pair Receiver to WiFi Controller


Top View of Wireless Receiver

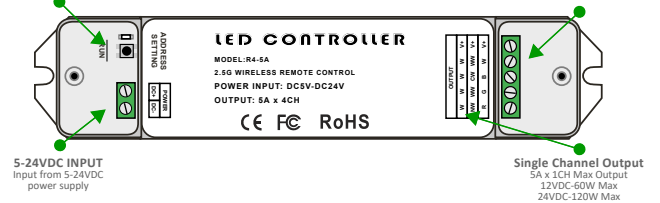


UX8 and WiFi-104 Pairing Guide

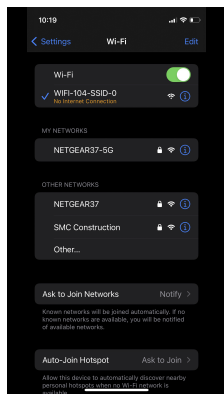


- 1
- Apply 5-24VDC power to your WiFi-104 Controller.
- Connect to the WiFi-104 through your WiFi phone or tablet settings.
- Download WiFi104 app.

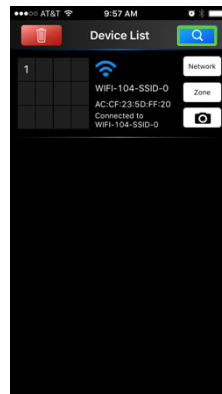


- 2
- Open WiFi104 app.
- If WiFi-104 doesn't show up in device list hit the blue search icon.
- Once the device is seen press the controller to get to the control screen.

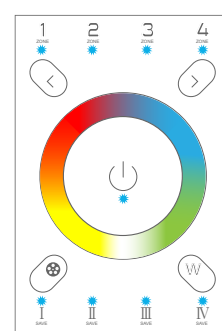


- 3
- Apply 5VDC Power to your UX8 controller.
- Press and hold the power button for 3+ seconds.
- All indicator lights will flash blue.

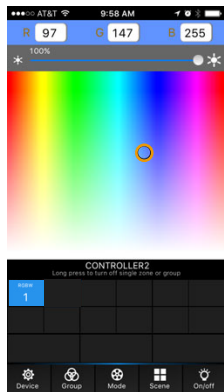


- 4
- Within 5 seconds press the color area in the WiFi104 App.

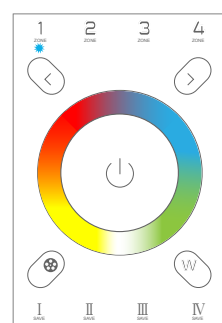


- 5
- The UX8 will beep, the indicator lights will stop flashing and go back to normal function.

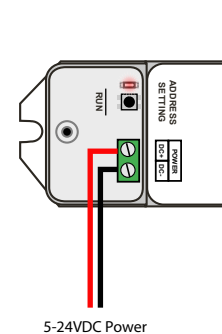


- 6
- Pair receivers to UX8.
- With 5-24VDC power applied to your receiver, press the black "RUN" button and let go.
- The red indicator light will turn from flashing red to solid red.

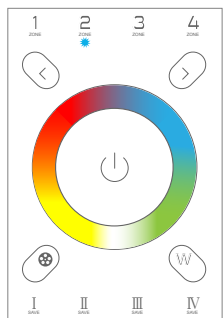

- 7
- Immediately press and hold the zone number on the UX8 that you wish to pair, a long beep signifies a successful pair.
- Repeat for additional receivers.

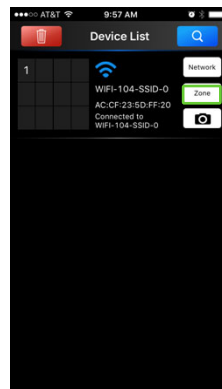

- 8
- Go back to device list and enter the zone setup.

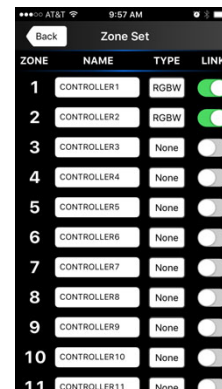

- 9
- Activate your zones according to the paired receivers to the UX8.