


CONNECTION INSTRUCTIONS

Receiver for WiFi-104 Controller, 5-24VDC 5A/CH




ADDRESS SETTING
Use this button to pair Receiver to WiFi Controller

Top View of Wireless Receiver

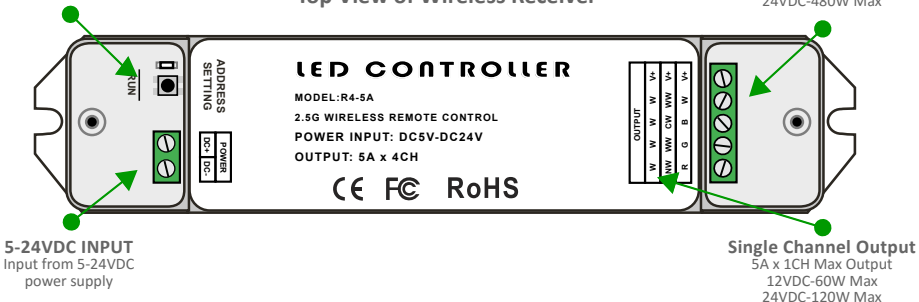


WiFi-104 Zone Receiver Pairing Guide: LC-LT-RGBW-RC

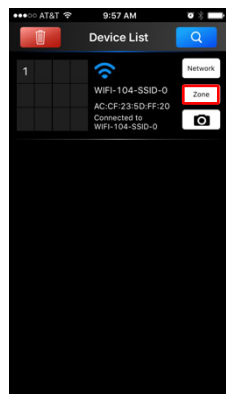

- 1 - Apply 5-24VDC power to your WiFi-104 Controller.
- Connect to the WiFi-104 through your WiFi phone or tablet settings.
- Open the WiFi104 app and choose the "Zone" button from the active controller in your Device List.




- 2 - Activate the zone you wish to pair by sliding the "LINK" toggle button to the right until it turns green.
- Note: WiFi-104 Controller will always act as Zone 1.
- Rename your zones by touching the zone name.
- Choose the control type by touching zone type.

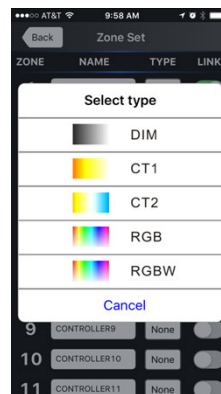


- 3 - Choose the proper control type for the zone you wish to pair.
- Note: Default control type is RGBW.




- 4 - Activate any additional Zone(s) that you wish to pair.
- Press the Back button in the upper left hand corner of your screen to get back to your Device List.

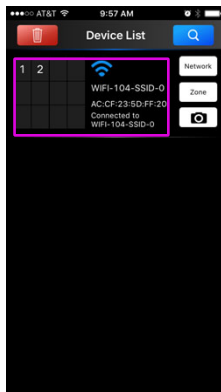


- 5 - From your Device List, click on the controller that you wish to pair your receivers to.

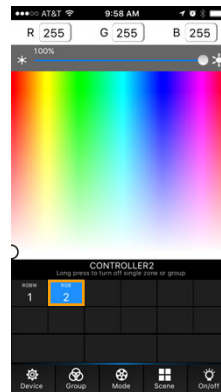


- 6 - Select the zone that you wish to pair your receiver to.
- Selected zone will be highlighted in blue.

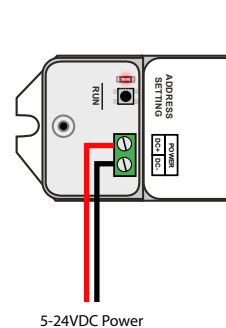

- 7 - With 5-24VDC power applied to your receiver, press the black "RUN" button and let go.
- The red indicator light will turn from flashing red to solid red.
- Note: To clear pairing, press and hold "RUN" button until you hear a long beep.

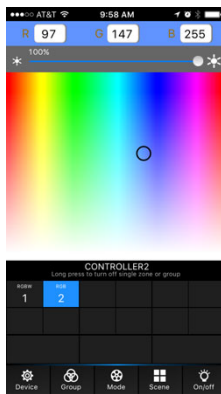

- 8 - Immediately after, press anywhere within the color palette selection in your WiFi104 app.
- A beep from the receiver will indicate a successful pairing.
- The red "RUN" indicator light on your receiver will return to flashing.

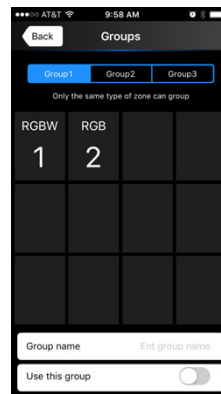

- 9 - Repeat steps 1-8 for any additional receiver(s) that you wish to pair.
- In the "Group" tab at the bottom of your app you can choose to control multiple zones over 3 groups.
- Choose the zones you want to group, add a group name and toggle the slider to the right to activate.