


## SPECIFICATIONS

## RGB LED Bar Light, Aluminum/Plastic Extrusion 12V - 40"

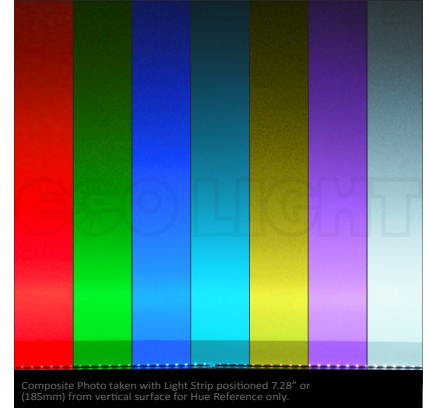

**PRODUCT NAME** RGB LED Bar Light, Aluminum Extrusion w/ Clear Plastic Cover 12V - 40"

**URL** [Click Here](#)

**SKU** SL-HK-RGB-40

**DESCRIPTION** This 40" RGB LED bar light comes housed in rigid aluminum extrusion and clear plastic cover. Each bar is 40"L x 0.69"W x 0.45"H. With a power output of 3.6W/ft, they are perfect for cove lighting, movie set, theatre, sign, indoor, outdoor and night club lighting. Every 40" bar can produce over 16 million different shades and tints of brilliant, vivid color utilizing 48 high quality 3-in-1 SMD LED chips. Each bar is compatible with all our existing RGB and DMX color controllers. These RGB bars are 4-Pin, 3 wire common anode with a quick-snap connector for easy installation of additional bars; both male and female ends. CE & RoHS certified. 50,000hrs average life. Three screw-down style mounting brackets and one female to 4-pin lead wire connector included. A max serial connection of 12m is possible with these rigid aluminum LED bars. A parallel connection is required if your lighting project needs more than 12m of our aluminum RGB bars. Non-submersible / non-UV proof.

**DIMENSIONS** 40"L x 0.69"W x 0.45"H (254mm L X 17.5mm W X 11.4mm H)

**LIFESPAN** 50,000 Hours

**DC VOLTS** 12VDC Constant Voltage

**RATING** IP63

**POWER USE** 3.6 Watts/ft.

**MAX OUTPUT** 10.7W / 892mA (0.892 A)

**CONNECTION TYPE** 4 Pin, 3 Loop, Common Anode w/ quick connectors

**WARRANTY** 1 Year Manufacturers

SKU	Color	Size	LED Qty	LED Type	Control Type	Outdoor Rating	Beam Angle	Voltage (VDC)	Current (mA)	Watts Required
SL-HK-RGB-40	RGB	40" x 0.69"	48	3-in-1 SMD	RGB or DMX	IP65	120°	12V	892mA	10.7W

These specification are subject to change without notice. This specification information is from the manufacturer of this product. Eco Light LED is not the manufacturer of this product. Copyright © 2010 Eco Light LED

EcoLightLED.com  
info@EcoLightLED.com

**ECO LIGHT**  
LED Lighting Solutions

775-636-6060  
866-348-3492