

PRODUCT DESCRIPTION

- Possible to obtain a line of light
- Concealed aluminum elements
- The extrusion does not interfere with a structure made of 5/8 inch (about 16mm) thick drywall
- Designed to reach an IP65 waterproof rating

FINISH :

Non anodized (raw) 



Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

Application

- to create a line of light flush with the surface of walls and ceilings

Assembly


- fixed in the groove with mounting adhesive
- extrusion fastening wings covered with gypsum plaster
- the protective insert TECH-50 ensures that the extrusion slot remains wide enough for the snap-in cover (its use is necessary during mounting and finishing works)

Additional information

- designed for up to four (0.39" / 10mm) wide LED strips
- line of light obtainable with the LIGER-50 cover and LED strips with a minimum of (36 LED/ft. / 120 LED/m)
- the cover is evenly illuminated with four LED strips, with fewer strips shadows appear on the cover
- the KOZUS-50 extrusion is equipped with ZM sockets (ZM Connectors are used to connect extrusions lengthwise, they are easily accessible even after mounting the extrusion in the ceiling)
- the groove cut out in the drywall to accommodate the extrusion should be (2.0"-2.2" / 51mm-56mm) wide


Possibility of making a linear fixture with IP65 protection, which means the fixture is dustproof and waterproof in contact with water jets

TECHNICAL DRAWING

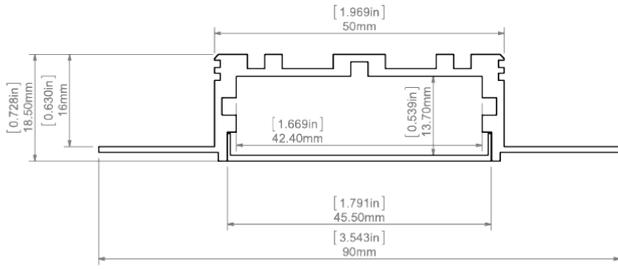


RELATED PRODUCTS

COVERS




LIGER-50 Cover
frosted
Ref: 17086

END CAPS



KOZUS-50 End
cap
Ref: 24282

ACCESSORIES




TECH-50
protective insert
/ Installation
Cover
Ref: 17125




ZM-NA-120
Connector
Ref: 42729




ZM-NA-135
Connector
Ref: 42725



ZM-NA-180
Connector for
non-anodized
extrusions
Ref: 42724



ZM-NA-90
Connector for
non-anodized
extrusions
Ref: 42723



ZM-NA-PION-90
Connector for
non-anodized
extrusions
Ref: 42726