PRODUCT DESCRIPTION

Fixture Certified to NSF 2 standards
when assembled by KLUS

- Designed to reach an IP67 waterproof rating
- Clean design of the lighting fixture
- Easy snap-in assembly and disassembly
- Small size

FINISH :

Silver anodized

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

Application

- the MICRO-H extrusion is intended for the construction of small-size, linear lighting fixtures, mounted to surfaces using a mounting bracket, which is concealed after the fixture has been mounted

Assembly

- snapped onto a PDS-H mounting bracket. The mounting bracket is attached with a screw suitable for the surface

Additional information

- spece for LED strip: 0.44" / 11.2 mm

Possibility of making a linear fixture with IP67 protection, which means the fixture is dustproof and waterproof.

TECHNICAL DRAWING

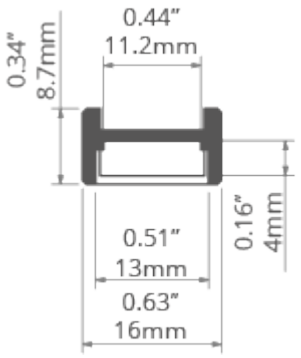
0.44"
11.2mm
0.34"
8.7mm
0.16"
4mm
0.51"
13mm
0.63"
16mm

RELATED PRODUCTS

COVERS

HS Cover clear
Ref: 1370

HS Cover frosted
Ref: 1369

KA Cover clear
Ref: 17036

KA Cover frosted
Ref: 17035

KA-PRO Cover clear
Ref: 17065

KA-PRO Cover frosted
Ref: 17064

LIGER Cover black
Ref: 17040











LIGER Cover frosted
Ref: 17037 (Old ref. 17031)

M-K Cover
Ref: 17038

PDS-LUK Cover
Ref: 17076







END CAPS

MICRO-H End cap
Ref: 24261

ACCESSORIES

FI-10-H-P Fastener
Ref: 42245

FI-10-H-W Fastener
Ref: 42243

PDS-H Mounting bracket
Ref: 24214

6x1.2 Gland
Ref: 00802