


SPECIFICATIONS

LED On/Off Switch with PIR Motion Sensor, 12-24VDC

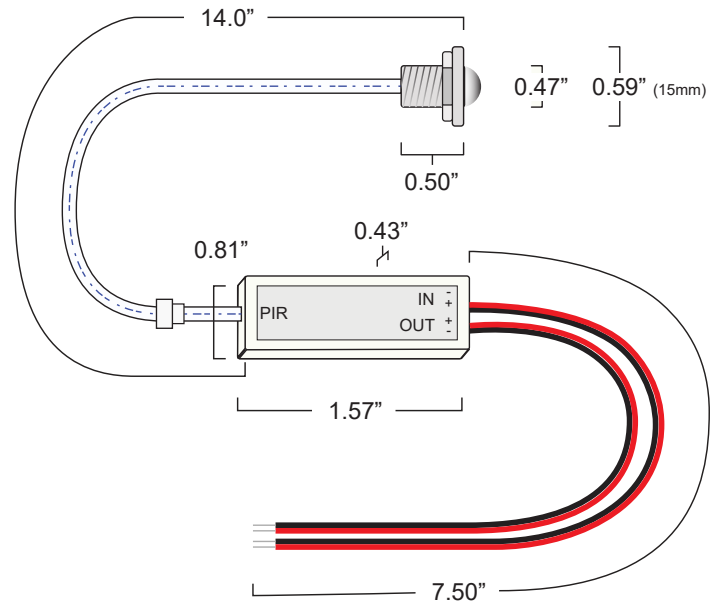

PRODUCT NAME	LED On/Off Switch with PIR Motion Sensor, 12-24VDC 2.5A
SKU	LC-LF-1-SENS
PRODUCT URL	Click Here
DESCRIPTION	Our mini PIR motion sensing switch is a small and effective low voltage on/off switch for 12-24 VDC constant voltage LED lighting products. The sensor detects motion within a 10ft radius which then switches your lights on for 30 seconds or until no more motion is detected. The sensor is conveniently attached to a threaded bolt designed to be permanently installed in any 0.47"-0.50" diameter hole using a 15mm size nut. This product is only intended to be used in a dry environment, ideal applications include dark areas where a light switch is inconvenient such as laundry rooms, bathrooms, attics, basements, garages, sheds, and storage areas. For larger installations use with a single channel signal amplifier to increase the load output.
INPUT POWER	12-24VDC constant voltage
CONNECTION TYPE	Common Anode (+)
OUTPUT CURRENT	2.5A x 1 Channel
OUTPUT POWER	12VDC - 30Watts / 24VDC - 60Watts
OPERATING TEMP	-4° ~ 140°F
RATING	Dry / Indoor
WARRANTY	1 year manufacturers

These specification are subject to change without notice. This specification information is from the manufacturer of this product. Ecolocity LED is not the manufacturer of this product.
Copyright © 2014 Ecolocity LED