


SPECIFICATIONS

Flicker Free LED Knob Dimmer, 12-24VDC 30A

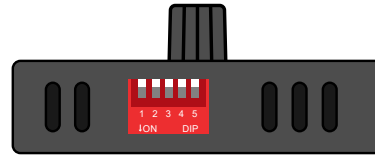


Frequency			Curve	
1	2	3	4	5

DIP Switch Settings

1	2	3	PWM	AMPS
↑	↑	↑	300HZ	30A
↓	↑	↑	500HZ	30A
↑	↓	↑	700HZ	30A
↓	↓	↑	1KHZ	30A
↑	↑	↓	3KHZ	20A
↑	↑	↓	5KHZ	15A
↑	↓	↓	10KHZ	10A

4	5	Curve
↑	↑	1
↓	↑	2
↑	↓	3



PRODUCT NAME	Flicker Free LED Knob Dimmer, Frequency Adjustable, 12-24VDC 30A
SKU	LC-LF-2DIM
PRODUCT URL	Click Here
DESCRIPTION	This small and simple LED Light Dimmer uses a knob to dim your 12-24VDC constant voltage LED lighting products from 0-100%. The impressive 30 amp output allows for dimming control of larger circuits without the need of additional accessories. DC input and output wires can easily be secured using the screw down connectors. Dim up to 360 watts of lighting using 12 Volt products or 720 watts using 24 Volt products. The small size of this PWM dimmer makes it easy to conceal and set the lights to the brightness level you prefer. Use this dimmer for LED strip lights, LED modules, LED light Ribbon or for dimming pretty much any one color LED product with 12-24VDC constant voltage power requirements.
CONTROLLER TYPE	PWM
SUPPLY VOLTAGE	12-24VDC constant voltage
OUTPUT	1 channel
DIMMING	0 to 100%
CONNECTION TYPE	2 Wire (+/-), common anode
DIMENSIONS	3.35" x 2.44" x 1.38"H
OUTPUT CURRENT	10A - 30A per channel (1 channel)
OUTPUT POWER	12VDC: 120W - 360W 24VDC: 240W - 720W
WARRANTY	1 year manufacturers

These specification are subject to change without notice. This specification information is from the manufacturer of this product. Ecolocity LED is not the manufacturer of this product.
Copyright © 2023 Ecolocity LED