


## SPECIFICATIONS

## Mini Digital LED Pixel Controller with RF Remote

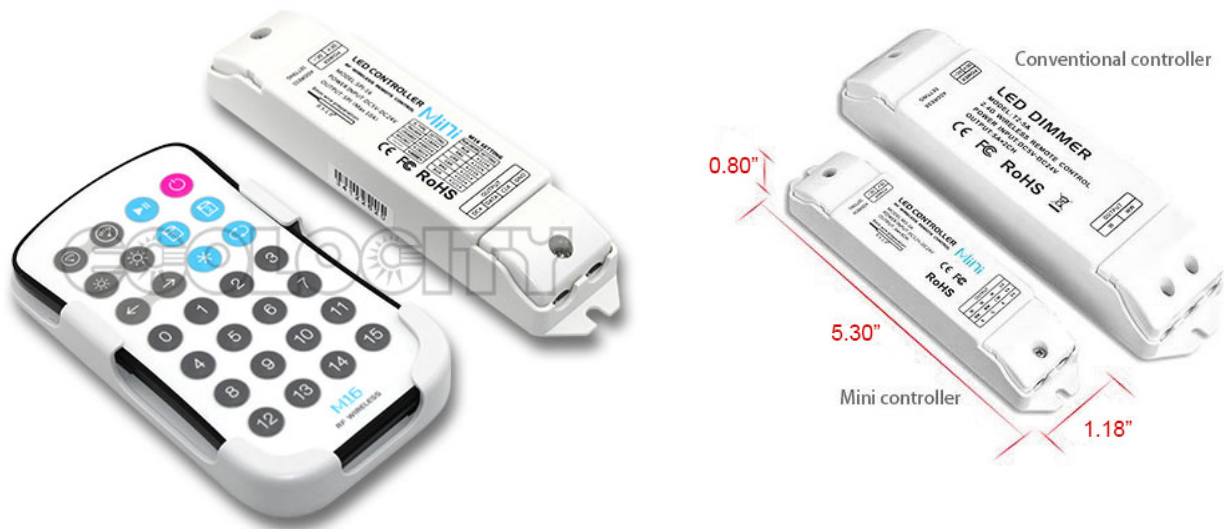

<b>PRODUCT NAME</b>	Mini Digital LED Pixel Controller with RF Remote, 5-24VDC 10A
<b>SKU</b>	LC-LT-PXL-1
<b>URL</b>	<a href="#">Click Here</a>
<b>DESCRIPTION</b>	Our Mini LED Pixel Controller with RF Remote is a small and powerful controller that creates vibrant color changing and color chasing effects using 5-24VDC digital type LED Strip lights, modules, or pixel lights with compatible type IC chips. With 16 built in modes and the ability to change the speed, brightness, pixel length (8-360px), IC type, chasing direction, and RGB order; this controller packs tons of functionality into a small package. Enhanced functions include playback of your favorite scenes in any order that you choose. With a max output rating of 10A this controller can power no more than 50W at 5VDC, 120W at 12VDC, or 240W at 24VDC.
<b>CONTROLLER TYPE</b>	Digital IC
<b>INPUT VOLTAGE</b>	5-24VDC constant voltage
<b>OUTPUT POWER</b>	10A Max (8-360 pixels) 50W/5VDC, 120W/12VDC , 240W/24VDC
<b>CONNECTION TYPE</b>	V+ , Data, Clock, Ground
<b>DIMENSIONS</b>	5.30" x 1.18" x 0.80"
<b>IC TYPES</b>	TM1803, TM1804, TM1809, TM1812, UCS1903, UCS1909, UCS1912, UCS2903, UCS2909, UCS2912, TLS3001, TLS3002, LPD6803, LPD1101, D705, UCS6909, UCS6912, LPD8803, LPD8806, WS2801, WS2803, WS2811, WS2812, P9813
<b>WARRANTY</b>	1 year manufacturers

These specification are subject to change without notice. This specification information is from the manufacturer of this product. Ecolocity LED is not the manufacturer of this product.  
Copyright © 2014 Ecolocity LED