CONNECTION INSTRUCTIONS

UL Recognized 4 in 1 WiFi Receivers, 12-36VDC

LC-SR-RGBW-REC-WI

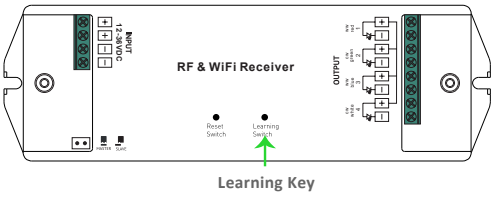

LC-SR-RGBW-RCWP

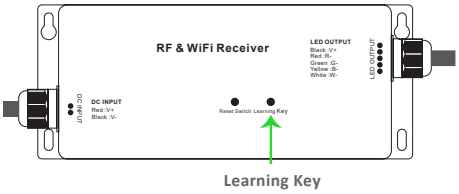

8 Zone WiFi Receiver Pairing Guide: RGBW

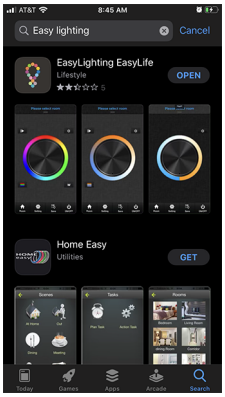

1

Download the *EasyLighting EasyLife* application on your smart phone or tablet.

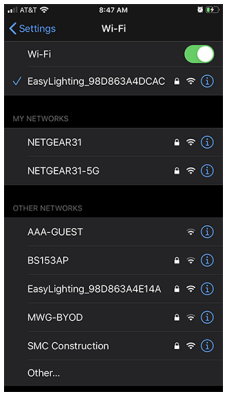

2

Apply 12-36VDC power to your waterproof receiver.

Connect to the EasyLighting_xxxxxxxx device.

Default password is: 0123456789

* Only 1 device can be configured at a time. When pairing multiple receivers we recommend you only power 1 receiver at a time.

3

Open the *EasyLighting* app.

Note: Default control type is RGBW. Tap the gray area around the color wheel 3x to select other control options.

If you receive message "WIFI device is not found, exit APP reconnect the correct network" this means you need to go back to WiFi setting and re-pair to device.

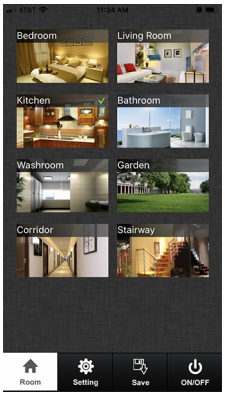

4

Press the "Room" button in the lower left corner.

Select the Room that you wish to pair your receiver to. Receiver will not pair if more than one room is selected. Multiple rooms can be paired to 1 receiver but must be paired 1 at a time.

Room names can be changed in the "Setting" tab.

5

Press the "Room" button to get back to the color wheel.

Press the "Learning Key" on the WiFi Receiver and let go. Then immediately touch and spin the color wheel from your phone.

Output LED lights will flash to indicate successful pair.



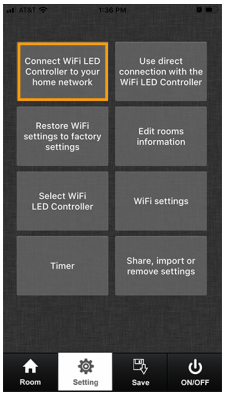

6

Your controller is now paired directly to your phone via WiFi connection. This is suitable for remote locations where no Internet is necessary.

For most applications you will want to pair your receiver to the local network.

To do so press the "Setting" button and then press "Connect WiFi LED Controller to your home network."

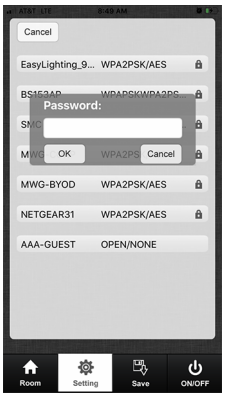

7

Before pairing to your WiFi network you will encounter two prompts. Simply click "I got it" and then "Yes" when asked if your mobile phone is connected to the controller.

Locate your local network, select and input your password.

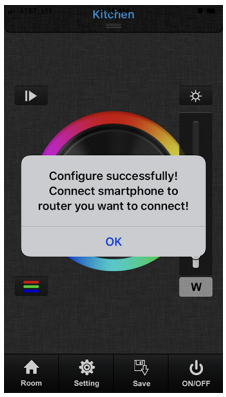

8

If configured successfully you will receive the following message.

Close out the app and navigate to the WiFi settings of your phone.

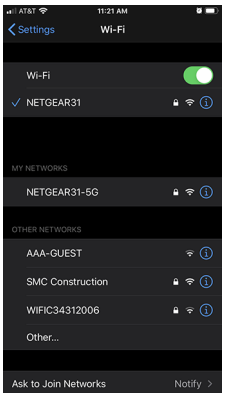

9

Check WiFi settings and be sure you are connected to your WiFi Network.
Please note that you must be connected to the 2.4GHz network.
WiFi Receiver will not pair with 5GHz network.

Open app again to control your lights.

Repeat these steps for multiple receivers.

1092 Greg Street
Sparks, NV 89431, USA

ECOLOCITY LED LIGHTING SOLUTIONS

ECOLOCITYLED.COM
775-636-6060